



PRESSURE ANALYSIS FOR THE SYSTEM OF ROTATING DISCS UNDER THE EFFECT OF SECOND ORDER ROTATION WITH MR-FLUID

Prof. Mohammad Miyan

Head, Department of Mathematics,
Shia P. G. College, University of Lucknow, Lucknow,
Uttar Pradesh, India

ABSTRACT

The system of rotating discs is analyzed in areas of various engineering fields like as flywheels, turbine engines, gears and others. This paper considers the subject of a plain rotating disc for the fluid flow, thereby providing an in-depth development of understanding of the flow physics and modeling approach for the second order rotation with MR-fluid. The solution of differential equation for the motion of system of discs with MR-fluid gives the pressure equation which numerically gives various solutions. In this analysis with MR-fluid the magnetic field is applying on the system that results the change in the behavior of fluid with variation of intensity of magnetic field. The pressure varies positively on increasing values of Hartmann number and also with the intensity of magnetic field.

Keywords: Hartmann number, Magnetic field, Pressure, Reynolds equation, Taylor's number, Viscosity.

2010 MSC: 76D08

Cite this Article: Prof. Mohammad Miyan, Pressure Analysis for The System of Rotating Discs Under the Effect of Second Order Rotation with MR-Fluid, International Journal of Mechanical Engineering and Technology (IJMET), 13(8), 2022, pp. 1-8. <https://iaeme.com/Home/issue/IJMET?Volume=13&Issue=8>

1. INTRODUCTION

The idea of 2-dimensional classical theories of lubrication [4], [10] changed into given through the equation of Osborne Reynolds [12]. In the wake of an analysis as the results of Beauchamp Tower experiment [13], he had given a differential equation that stated as Reynolds Equation [12]. The simple mechanism and formation of the fluid film changed into discovered via means of that experiment with few assumptions that the fluid film thickness is much smaller than its axial and longitudinal dimensions and if lubricant layer is to supply stress among the bearing and the shaft then the layer will range the thickness of the fluid film.

After sometimes, Osborne Reynolds once more revised his differential equation that changed into advanced model and stated as: Generalized Reynolds Equation [7], [10].

This differential equation relies upon on viscosity, density, film thickness, transverse and longitudinal velocities. The idea of the rotation [1] of the fluid film approximately an axis, which lies throughout the fluid film, offers a few amazing solutions within the lubrication issues of the fluid mechanics. The starting place of rotation changed via means of a few theorems of vorticity within the rotating fluid dynamics. The rotation induces aspect of vorticity within the course of rotation of fluid film and outcomes springing up from it are predominant, for big Taylor's Number, it effects in streamlines turning into limited to transverse to course of rotation of the fluid film. The today's prolonged model of the Generalized Reynolds Equation [7], [10] is referred to as the Extended Generalized Reynolds Equation [1], [3] that takes into consideration of outcomes of uniform rotation approximately an axis, which lies throughout the fluid film and relies upon on rotation quantity M [1], that is the root of the classical Taylor's Number. The generalization of the concept of hydrodynamic lubrication is stated because the Rotatory Theory of Hydrodynamic Lubrication [1], [3]. The idea of the Second Order Rotatory Theory of Hydrodynamic Lubrication [3], [8] changed into given via means of keeping expressions containing as much as 2nd powers of M and neglecting big powers of M . The lubrication of discs may be made mechanically equal to gears in the event that they have the identical radius at their touch line and rotate on the identical angular velocities that of the gears. For the machine of discs, we are able to take the origin on the floor of disc of radius R on the lines of centers of the discs. The geometry of the machine of discs is given by the figure (1.1) and figure (1.2).

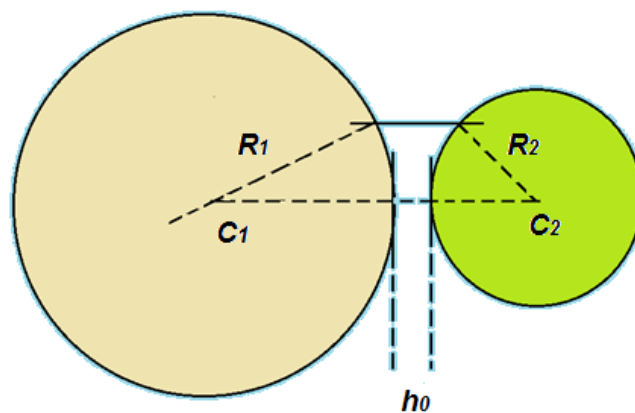


Figure- (1.1) (Geometry of system of discs)

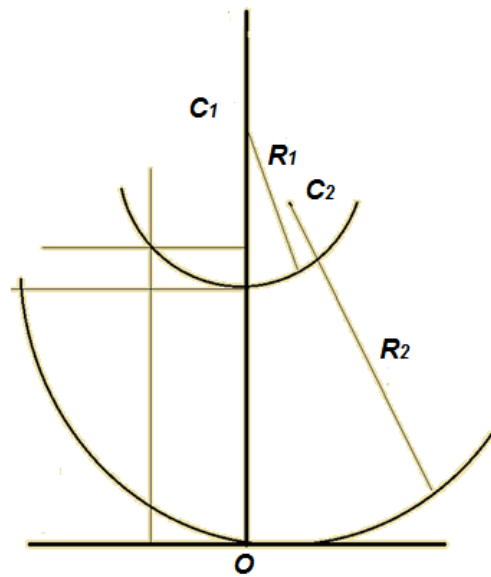


Figure (1.2) (Film thickness of system of discs)

The fluid film thickness 'h' will be:

$$h = h_0 \left[1 + \frac{y^2}{2h_0} \left(\frac{1}{R_1} + \frac{1}{R_2} \right) \right] \quad (1.1)$$

$$\left(\frac{1}{R_1} + \frac{1}{R_2} \right) = \frac{1}{R} \quad (1.2)$$

$$\tan \theta = \frac{y}{\sqrt{2Rh_0}} \quad (1.3)$$

$$h = h_0 \sec^2 \theta \quad (1.4)$$

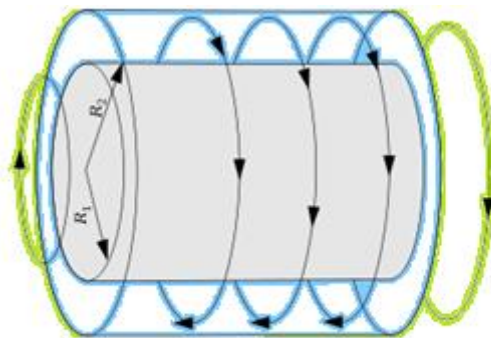


Figure (1.3) (System of rotation of discs [19], [20])

2. GOVERNING EQUATIONS AND BOUNDARY CONDITIONS:

The Extended Generalized Reynolds Equation of the second order rotation, in increasing powers of M can be expressed as equation (2.1).

$$\begin{aligned} \frac{\partial}{\partial x} \left[-\frac{h^3}{12\mu} \left(1 - \frac{17M^2\rho^2h^4}{1680\mu^2} \right) \rho \frac{\partial P}{\partial x} \right] + \frac{\partial}{\partial y} \left[-\frac{h^3}{12\mu} \left(1 - \frac{17M^2\rho^2h^4}{1680\mu^2} \right) \rho \frac{\partial P}{\partial y} \right] \\ + \frac{\partial}{\partial x} \left[-\frac{M\rho^2h^5}{120\mu^2} \left(1 - \frac{31M^2\rho^2h^4}{3024\mu^2} \right) \frac{\partial P}{\partial y} \right] \\ - \frac{\partial}{\partial y} \left[-\frac{M\rho^2h^5}{120\mu^2} \left(1 - \frac{31M^2\rho^2h^4}{3024\mu^2} \right) \frac{\partial P}{\partial x} \right] \\ = -\frac{\partial}{\partial x} \left[\frac{\rho U}{2} \left\{ h - \frac{M^2\rho^2h^5}{120\mu^2} \left(1 - \frac{31M^2\rho^2h^4}{3024\mu^2} \right) \right\} \right] \\ - \frac{\partial}{\partial y} \left[\frac{M\rho^2U}{2} \left\{ -\frac{h^3}{12\mu} \left(1 - \frac{17M^2\rho^2h^4}{1680\mu^2} \right) \right\} \right] \end{aligned} \quad (2.1)$$

In the above equation; x, y and z belongs to the coordinate system, μ is the dynamic viscosity of the fluid, U is the sliding velocity, P belongs to pressure, ρ is the density of fluid.

Let us consider that the disc is stationary at the lower surface transverse of the fluid film at the place of zero sliding and $U=+U$ (constant). Also considering that the pressure variation in x -direction is too low in comparison to the variation in its perpendicular direction. So the expressions having terms of pressure gradient $\partial p/\partial x$ can be omitted in comparison to the terms having $\partial p/\partial y$ in the final differential equation, so that P can be taken as function of only y . Taking $h=h(y)$, $U=+U$, $P=P(y)$;

$$\begin{aligned} \frac{\partial}{\partial y} \left[-\frac{h^3}{12\mu} \left(1 - \frac{17M^2\rho^2h^4}{1680\mu^2} \right) \rho \frac{\partial P}{\partial y} \right] + \frac{\partial}{\partial x} \left[-\frac{M\rho^2h^5}{120\mu^2} \left(1 - \frac{31M^2\rho^2h^4}{3024\mu^2} \right) \frac{\partial P}{\partial y} \right] \\ = -\frac{\partial}{\partial x} \left[\frac{\rho U}{2} \left\{ h - \frac{M^2\rho^2h^5}{120\mu^2} \left(1 - \frac{31M^2\rho^2h^4}{3024\mu^2} \right) \right\} \right] \\ - \frac{\partial}{\partial y} \left[\frac{M\rho^2U}{2} \left\{ -\frac{h^3}{12\mu} \left(1 - \frac{17M^2\rho^2h^4}{1680\mu^2} \right) \right\} \right] \end{aligned} \quad (2.2)$$

We have

$$M^2 = T_a = \frac{4\Omega^2 L^2}{\mu^2} \quad (2.3)$$

$$H_a = LB \sqrt{\frac{\sigma}{\mu}} \quad (2.4)$$

Where,

T_a =Taylor's number

H_a =Hartmann number

Ω =Characteristic angular velocity

L =Characteristic length scale perpendicular to the direction of rotation

B =Magnetic field intensity

σ =Electric conductivity

Hence the differential equation for the motion of system in the fluid can be expressed as:

$$\frac{d}{dy} \left[-\frac{h^3}{12\mu} \left(1 - \frac{17 \Omega^2 H_a^4 \rho^2 h^4}{420 \mu^2 B^4 \sigma^2} \right) \rho \frac{\partial P}{\partial y} \right] = -\frac{d}{dy} \left[\frac{\Omega B^2 \rho^2 U}{\sigma H_a^2} L^3 \left\{ -\frac{h^3}{12\mu} \left(1 - \frac{17 \Omega^2 H_a^4 \rho^2 h^4}{420 \mu^2 B^4 \sigma^2} \right) \right\} \right] \quad (2.5)$$

The imposed boundary conditions are as follows:

- (i) $P=0$ at $h=h_0$ or $P=0$ at $y=0$ or $P=0$ at $\theta=0$
 (ii) $P=dP/d\theta=0$ at $y=y_1$ or $\theta=\gamma$ (say) (2.6)

3. PRESSURE

The solution of the differential equation under the boundary conditions imposed is given by

$$P = -\sqrt{\frac{Rh_0}{2}} M \rho U \left[\frac{17 \Omega^2 \rho^2 B^2 L^4 h_0^4}{420 \mu^2} F(\theta) - \tan \theta F(\gamma) \right] \quad (3.1)$$

$$P = -\sqrt{\frac{Rh_0}{2}} M \rho U \left[\frac{17 \Omega^2 \rho^2 h_0^4}{420 B^2 \sigma^2} H_a^4 F(\theta) - \tan \theta F(\gamma) \right] \quad (3.2)$$

Where $F(\theta)$ is given by

$$F(\theta) = \tan \theta \left[\frac{1}{9} \sec^8 \theta + \frac{8}{63} \sec^6 \theta + \frac{48}{315} \sec^4 \theta + \frac{192}{945} \sec^2 \theta + \frac{384}{945} \right] \quad (3.3)$$

4. CALCULATION TABLES AND GRAPHS

The numerical calculations for pressure variations with respect to magnetic field and Hartmann number can be calculated that is given by the table-4.1 and table-4.2 respectively.

4.1. Table: 4.1

$U = 80$, $\rho = 1.0$, $R = 3.35$, $h_0 = 0.0167$, $\mu = 0.0002$, $\theta = 30^\circ$, $\gamma = 60^\circ$, $\Omega = 23.88059$, $M = 0.1$, $\sigma = 1$

S. No.	B	P
1.	0.5	-3.48704
2.	1.0	33.45106
3.	1.5	95.01456
4.	2.0	181.20346
5.	2.5	292.01776

4.2. Table 4.2

$U = 80$, $\rho = 1.0$, $R = 3.35$, $h_0 = 0.0167$, $\mu = 0.0002$, $\theta = 30^\circ$, $\gamma = 60^\circ$, $\Omega = 23.88059$, $M = 0.1$, $\sigma = 1$, $B = 5$

S. No.	H_a	P
1.	0	5.79974
2.	40	492501.92
3.	60	1970025.08
4.	80	7880117.72
5.	100	12312687.2

The graphical representations of the variation of pressure with respect to the magnetic field B and Hartmann number H_a are shown by the figure 4.1 and figure 4.2 respectively.

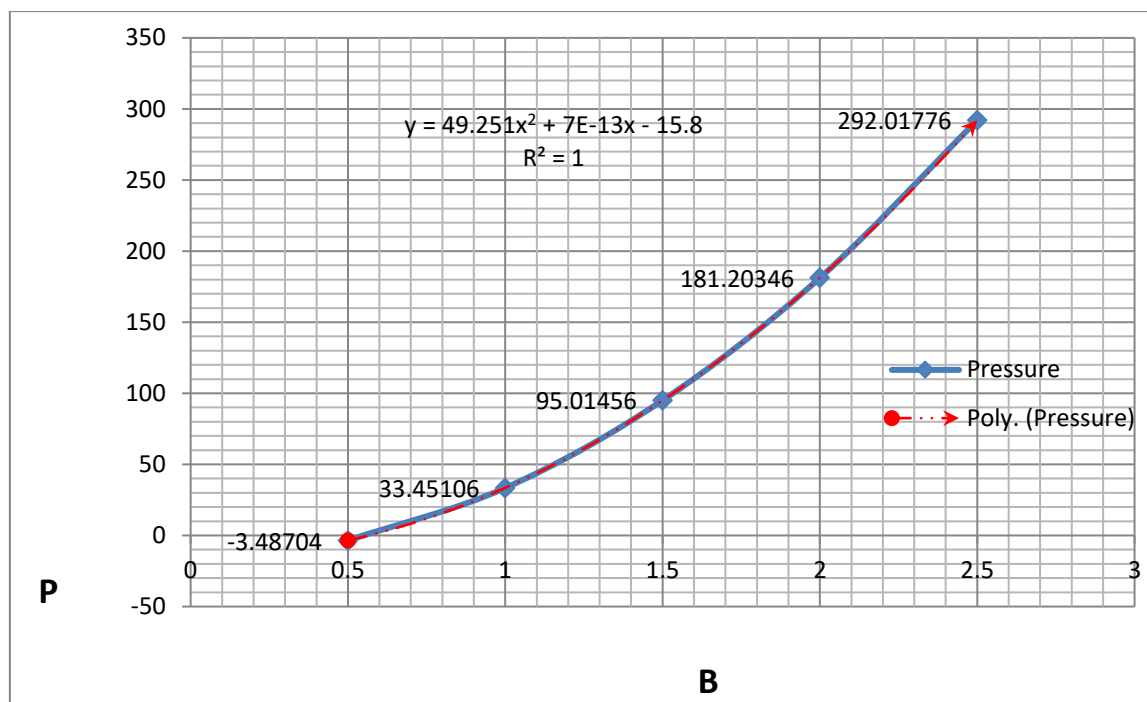


Figure-4.1 (Variation of Pressure with respect to Magnetic field B with exponential trend line)

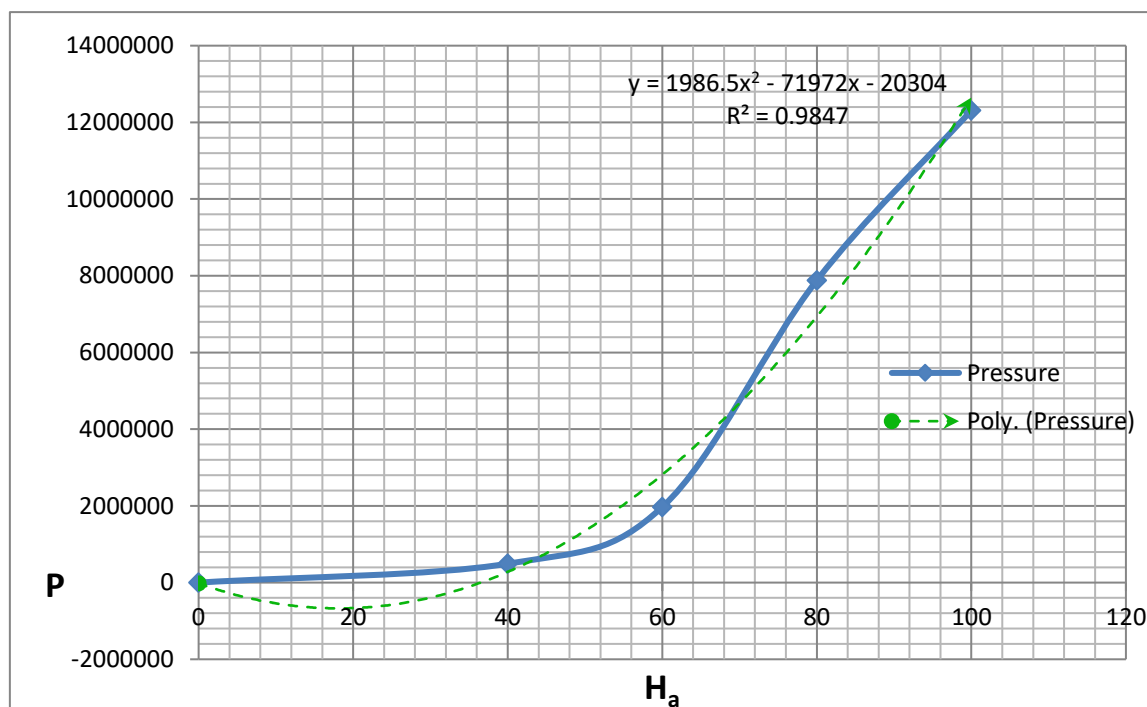


Figure 4.2 (Variation of Pressure with respect to Hartmann number H_a with polynomial trend line)

5. RESULTS AND DISCUSSION

The variation of pressure with respect to magnetic field B is shown by the table (4.1) and graph (4.1). The figure-4.1 shows the polynomial trend line by $y=49.25 x^2 - 2 E - 13 x - 15.8$; $R^2=1$. The variation of pressure with respect to Hartmann number H_a by the table (4.2) and graph (4.2) with polynomial trend line $y=1986 x^2 - 71972 x - 20304$; $R^2=1$. The figure-4.1 and figure-4.2 show that the pressure, vary with magnetic field and Hartmann number.

6. CONCLUSION

The derived equation of pressure is given by equation (3.1) and (3.2). The calculated values of the pressure against magnetic field B is shown in the table and graphical representation for the variation of pressure is also shown by figure-4.1. The comparisons of the pressure have been done with the help of geometrical figures, expressions, calculated tables and graphs for the lubricating discs in the second order rotatory theory of hydrodynamic lubrication. The analysis of equation for pressure, table and graphs show that pressure is not independent of dynamic viscosity μ and increase with increasing values of magnetic field intensity B , Hartmann number H_a , rotation number M , density of used fluid ρ , velocity of fluid U , characteristic length of the bearing L and film thickness h_0 .

ACKNOWLEDGEMENT

This research was supported by U. P. State Higher Education Council, Uttar Pradesh for financial assistance under the Research and Development Programs of U. P. Government for teachers of Universities, Government and Aided colleges.

CONFLICT OF INTERESTS

The author(s) declare that there is no conflict of interests.

REFERENCE

- [1] Banerjee, M.B., Gupta, R.S. and Dwivedi, A.P. (1981) The Effects of Rotation in Lubrication Problems, WEAR, 69, 205.
- [2] Banerjee, M.B., Chandra, P. and Dube, G.S.(1981) Effects of Small Rotation in Short Journal Bearings, Nat. Acad. Sci. Letters, Vol. 4, No.9.
- [3] Banerjee, M.B., Dube, G.S., Banerjee, K. (1982) The Effects of Rotation in Lubrication Problems: A New Fundamental Solutions, WEAR, 79, pp. 311-323.
- [4] Cameron, A. (1981) Basic Lubrication Theory, Ellis Harwood Limited, Coll. House, Watergate, Chicester, p. 45-162.
- [5] Cameron, A. (1958) The Viscous Wedge Trans., ASME, 1, 248.
- [6] Chandrasekhar, S. (1970) Hydrodynamic and Hydro magnetic Stability, Oxford University Press, London, 83.
- [7] Dowson, D. (1962) A Generalized Reynolds Equations for Fluid Film Lubrication, Int. J. Mech. Sci., 4, 159.
- [8] Dube, G.S. and Chatterjee, A. (1988) Proc. Nat. Acad. Sci. India, 58(58), I: 79.
- [9] Halling, J. (1975) Principles of Tribology, The Macmillan Press Ltd., London, 369.
- [10] Hori, Y.(2005) Hydrodynamic Lubrication, Springer Science & Business Media p.23-31.
- [11] Miyan, M. (2016) Pressure Analysis for the system of rotating discs under the effects of second order rotation, (IASIR) American International Journal of Research in Science, Technology, Engineering & Mathematics, 16 (2):164-168.
- [12] Pinkus, O. and Sternlicht, B. (1961) Theory of Hydrodynamic Lubrication, Mc. Graw Hill Book Company, Inc. New York, 5-64.

- [13] Reynolds, O. 1886. Phil. Trans. Roy. Soc. London, Part I, 177.
- [14] Reynolds, O. (1886) On the Theory of Lubrication and its Application to Mr. Beauchamp Tower's Experiment, Phil. Trans. Roy. Soc. London, 177 (I), 157.
- [15] Saibel, E. A. and Macken, N.A. (1973) Annual Review of Fluid Mechanics, Inc. Palo. Alto, Cal. Vol.5.
- [16] Shaw, M.C. and Macks, E.F. (1949) Analysis and Lubrication of Bearings, Mc. Graw Hill Book Company, Inc., New York.
- [17] <http://www.machinerylubrication.com/Read/29654/journal-bearing-oil>
- [18] <http://nptel.ac.in/courses/116102012/121>
- [19] https://en.wikipedia.org/wiki/Taylor%E2%80%93Couette_flow
- [20] <http://www.slideshare.net/KrunalParmar4/viscosity-measurement-43704393>